

Design Features

Housing: Heavy gauge aluminum housing is curved with lens frame internally welded in place. Housing secures to the mounting plate with four stainless steel fasteners.

Lens: Clear tempered glass is secured to the housing with three retaining clips. Optional frosted side lens available. "FSL"



Optical System: Segmented reflector assembly combines specular and hammertone aluminum to produce a smooth forward throw distribution. Optional wide side-to-side throw is available. "WT"

Mounting Plate: Heavy gauge .125 wall aluminum plates bolt to the wall. Ballast module and housing are attached to the plate.

Ballast/Lamp Assembly: All ballast shall have a high power factor and be suitable for -20° F operation. The ballast module is easily removable for maintenance. Sockets shall be porcelain medium base and pulse-rated.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations, UL 1598 and Canadian CSA Std. C22.2 No. 250.0.

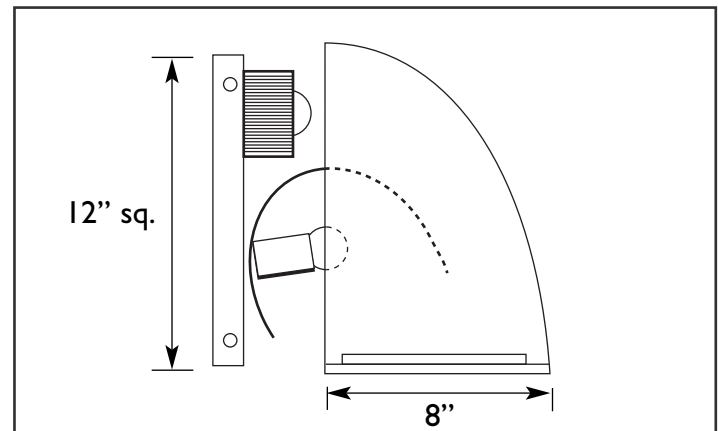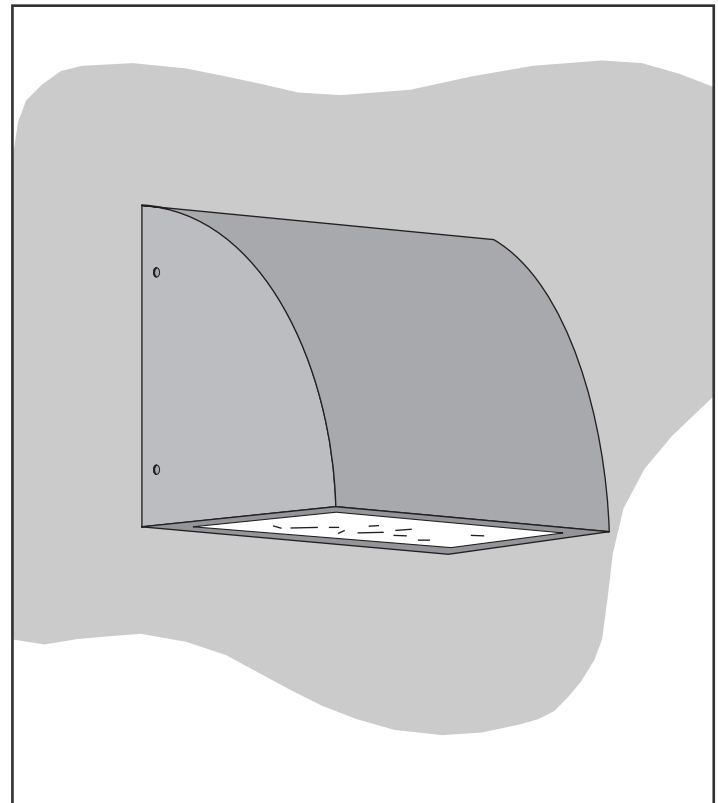

Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
SX-I	70w/HPS = 07S	120	1F = Single Fuse	BZ = Bronze
	100w/HPS = 10S	208	2F = Double Fuse	BK = Black
	150w/HPS = 15S	240	PH = Button Cell	WH = White
	70w/MH = 07H	277	QR = Quartz Relay	SL = Silver
	100w/MH = 10H	480	WT = Wide Throw	CC = Custom Color
	175w/MH = 17H		FSL = Frosted Side Lens	
			UM = Up Mount	

Example: 100 Watt, Metal Halide, 120 Volts, Single Fuse, Bronze
SX-110H-120/1F/BZ