

Design Features

Housing: Formed from heavy gauge aluminum, the housing is curved with lens frame internally welded in place. Housing secures to the mounting plate with (4) stainless steel fasteners.

Lens: Clear tempered glass is secured in the housing with three (3) retaining clips. Optional up light is available "UL", in either 50% or 10%.



Optical System: Segmented reflector assembly combines specular and hammertone aluminum to produce a smooth forward throw distribution. Optional wide side to side throw is available. "WT"

Mounting Plate: Heavy gauge .125 wall aluminum plate bolts to the wall. Ballast module and housing are attached to the plate.

Ballast/Lamp Assembly: All ballast shall have a high power factor and be suitable for -20° F operation. The ballast module is easily removable for maintenance. The lamp socket shall be porcelain mogul base pulse-rated and securely mounted to the reflector. Medium base sockets will be supplied only when lamp requires it.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

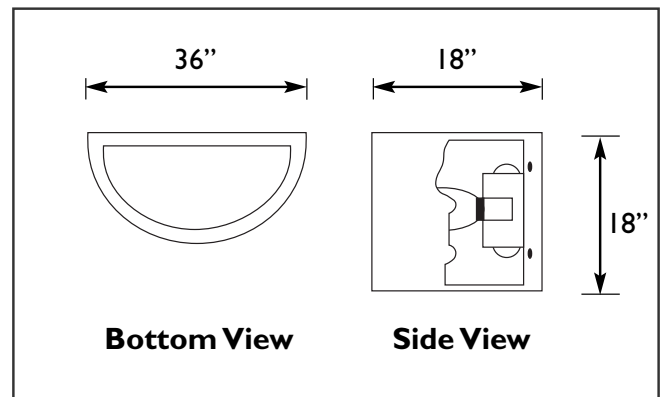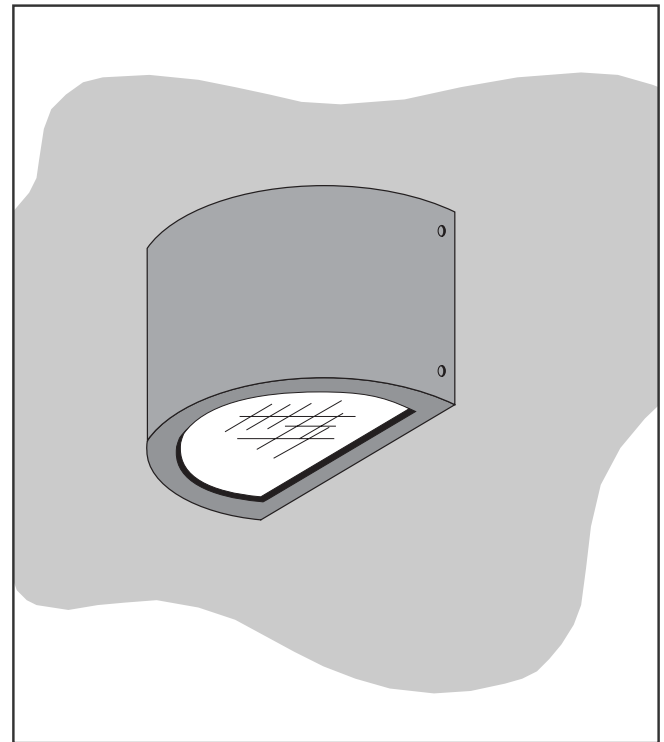

Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
SK-2	400w/MH = 40H	120	1F = Single Fuse	BZ = Bronze
	250w/MH = 25H	208	2F = Double Fuse	BK = Black
	175w/MH = 17H	240	PH = Button Cell	WH = White
	100w/MH = 10H	277	QR = Quartz Relay	SL = Silver
	150w/HPS = 15S	480	UL/10 = 10% UP	CC = Custom Color
	100w/HPS = 10S		UL/50 = 50% UP	
	250w/HPS = 25S		WT = Wide Throw	
	400w/HPS = 40S			

Example: 100 Watt, Metal Halide, 120 Volts, Single Fuse, Bronze
SK-210H-120/1F/BZ