

Design Features

Housing: Heavy gauge aluminum housing is internally welded and sealed to prevent water entry or light leaks. Housing is bolted directly to the wall.

Lens Frame: Formed from extruded aluminum, the frame rests on gasketed support frame in housing. Lens frame is secured to the housing with two stainless steel tamper proof fasteners.

Lens: Clear heat tempered glass lens is gasketed and secured in the frame with (4) clips.



Optical System: Segmented reflector assembly combines specular and hammertone aluminum to produce a smooth forward throw distribution. Optional wide side to side throw is available. "WT"

Ballast/Lamp Assembly: All ballast shall be high power factor and suitable for -20° F operation. The ballast module is easily removable for maintenance. Lamp sockets shall be porcelain mogul base pulse-rated.

Mounting Bracket: Housing bolts directly to wall. Unit should be sealed at wall when used outdoors.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

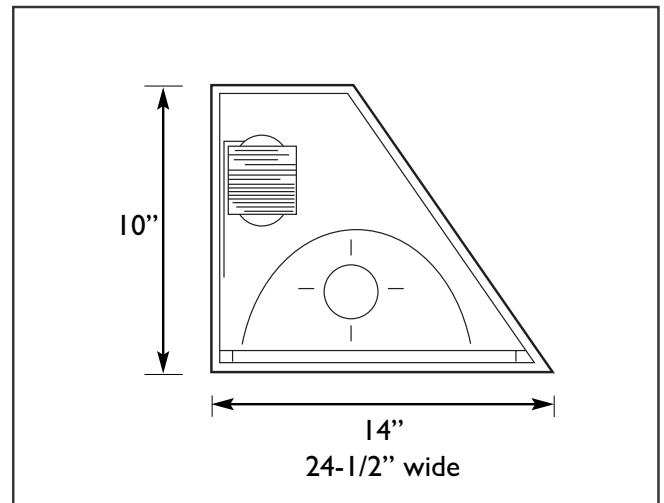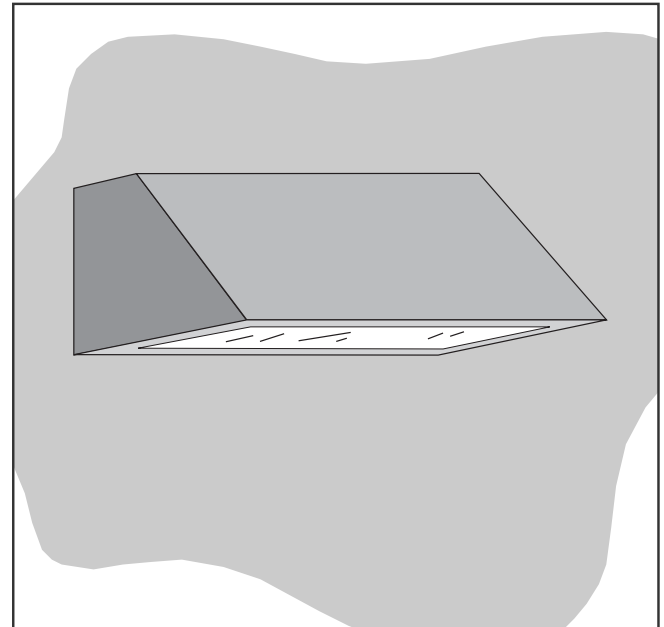

Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
SV-2	400w/HPS = 40S	120	1F = Single Fuse	BZ = Bronze
	250w/HPS = 25S	208	2F = Double Fuse	BK = Black
	150w/HPS = 15S	240	PH = Button Cell	WH = White
	400w/MH = 40H	277	QR = Quartz Relay	SL = Silver
	250w/MH = 25H	480	WT = Wide Throw	CC = Custom Color
	175w/MH = 17H			

Example: 400 Watt, Metal Halide, 120 Volts, Single Fuse, Bronze
SV-240H-120/1F/BZ