

## Design Features

**Enclosure:** One piece seamless high strength polycarbonate cube with rounded corners. Available in either 15" or 18" diameters. Cubes are available in clear, smoke and bronze tints. All cubes are UV stabilized for longer life.


**Fitter:** Heavy duty cast aluminum holder provides strength and durability. Spring loaded retaining brackets secure enclosure to gasketed fitter. Internal stainless steel set screws secure assembly to 3" diameter tenon.

**Optical System:** Cylindrical glass refractor is available for use with all available enclosures. Specify "RF" when refractor is required.

**Ballast/Lamp Assembly:** All ballast shall have a high power factor and be suitable for -20° F operation. A cover for core and coil ballast is provided with transparent enclosures. Postline ballast will be provided when possible. Porcelain medium base pulse-rated socket is attached to fitter assembly.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

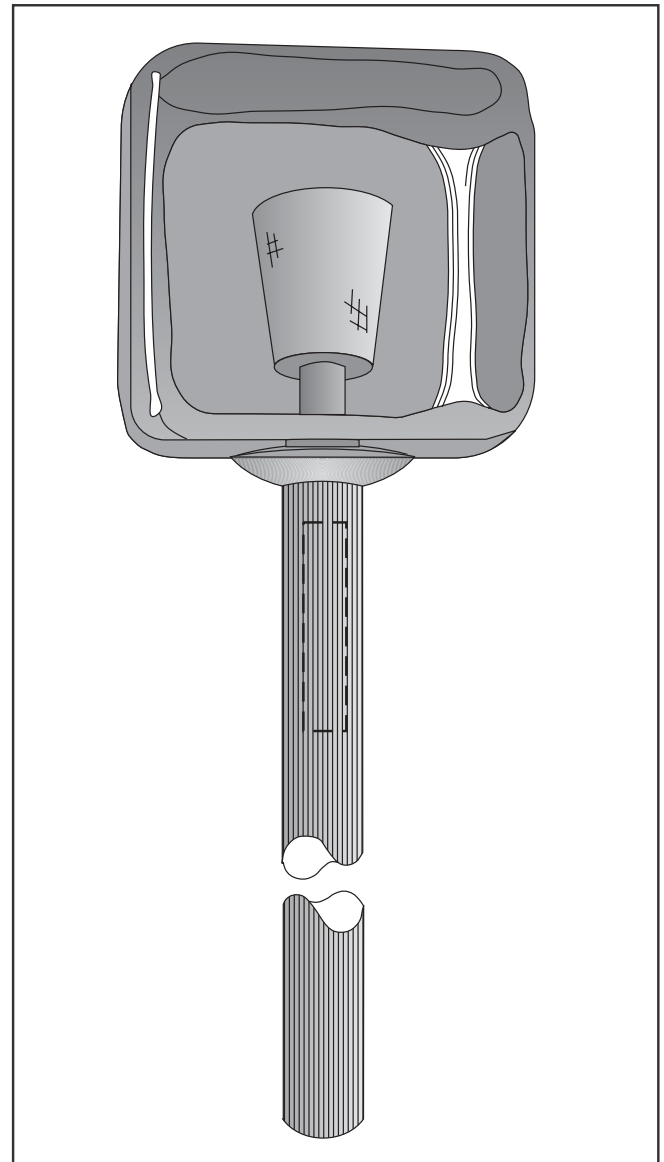

### Maximum Lamp Wattage

15" - 100w/MV & HPS

18" - 175w/MH & 150w/HPS

## Specification Guide

| Series | Size       | Wattage/Lamp   | Volts | Tint       | Options              | Finish            |
|--------|------------|----------------|-------|------------|----------------------|-------------------|
| CU     | 15"<br>18" | 100w/INC = INC | 120   | C = Clear  | RF = Refractor       | BZ = Bronze       |
|        |            | 70w/MH = 07H   | 208   | B = Bronze | WM = Wall Mount      | BK = Black        |
|        |            | 100w/MH = 10H  | 240   | S = Smoke  | 2A = Twin Assembly   | WH = White        |
|        |            | 175w/MH = 17H  | 277   |            | 3A = Triple Assembly | SL = Silver       |
|        |            | 70w/HPS = 07S  | 480   |            | 4A = Quad Assembly   | CC = Custom Color |
|        |            | 100w/HPS = 10S |       |            |                      |                   |
|        |            | 150w/HPS = 15S |       |            |                      |                   |

**Example:** 18" Cube, 150 Watt, High Pressure Sodium, 120 Volts, Clear, Wall Mount, Black  
**CU-1815S-120/C/WM/BK**