

Design Features

Housing: Heavy gauge cast aluminum housing is designed for recessed dry or concrete pour applications. Housing is provided with two wire entry holes. Specify 1/2" or 3/4" NPT. Neoprene gasket is installed between housing and face-plate.



Lens Plate: Rugged cast aluminum face-plate with 45° louvers, secures clear tempered glass. Face-plate is secured to housing with two stainless tamper proof fasteners.

Optical System: Diffused satin aluminum reflector provides asymmetric distribution.

Ballast/Lamp Assembly: HID ballast shall have a high power factor. Fluorescent ballast shall be electronic dual voltage. HID sockets shall be porcelain, medium base and pulse-rated.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

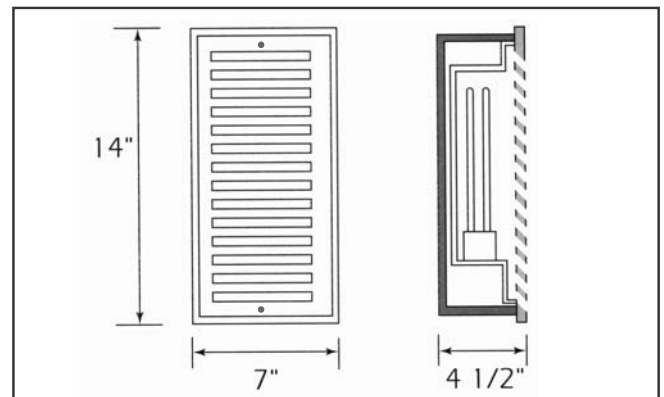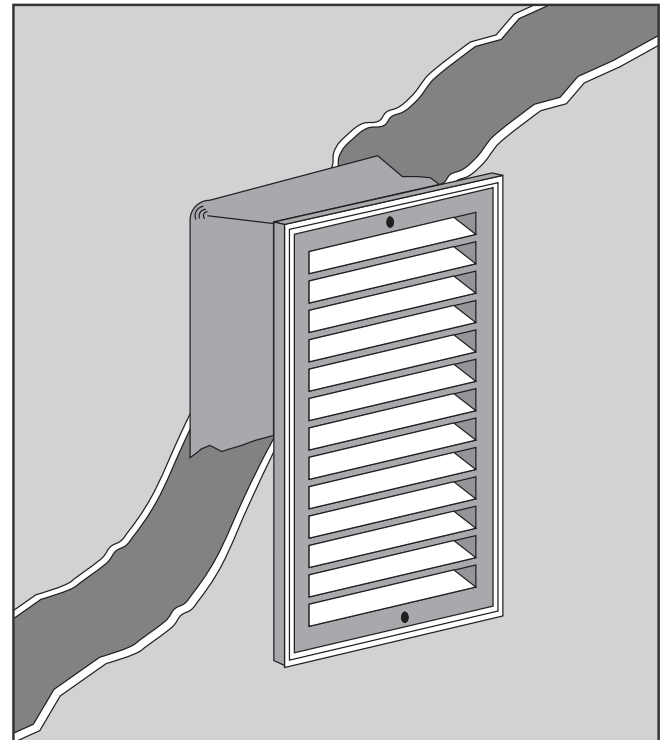

Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
CF	26w/PLQ = I26P	120	IF = Single Fuse 2F = Double Fuse QR = Quartz Relay	BZ = Bronze BK = Black WH = White SL = Silver CC = Custom Color
	32w/PLT = I32P	208		
	42w/PLT = I42P	240		
	50w/MH = I05H	277		
	70w/MH = I07H			
	70w/HPS = I07S			
	50w/HPS = I05S			

Example: 50 Watt, Metal Halide, 120 Volts, Single Fuse, Bronze
CF-I05H-I20/IF/BZ